


M - MTU code: initial installation

Operational limits				
P	4 bar			
V	12 m/s			
T	-35 +150°C			
Standard components - DIN 24960				
Metal parts	F1	-	-	-
Spring	F	-	-	-
Elastomeric parts	P4	-	-	-
Primary Ring	C	-	-	-
Mating Ring	Q	-	-	-
Impeller	T	-	-	-



Type	Description			d	D	WH	H	f	dg	M
UGG-1	16	36,6	12,2	15,918±16	36,449±36,474	12,5±0,75	7,4	28,5±0,3	68,7	9627769480
UGG-2	16	36,6	12,2	15,918±16	36,449±36,474	12,5±0,75	7,4	28,5±0,3	71,5	9628838280

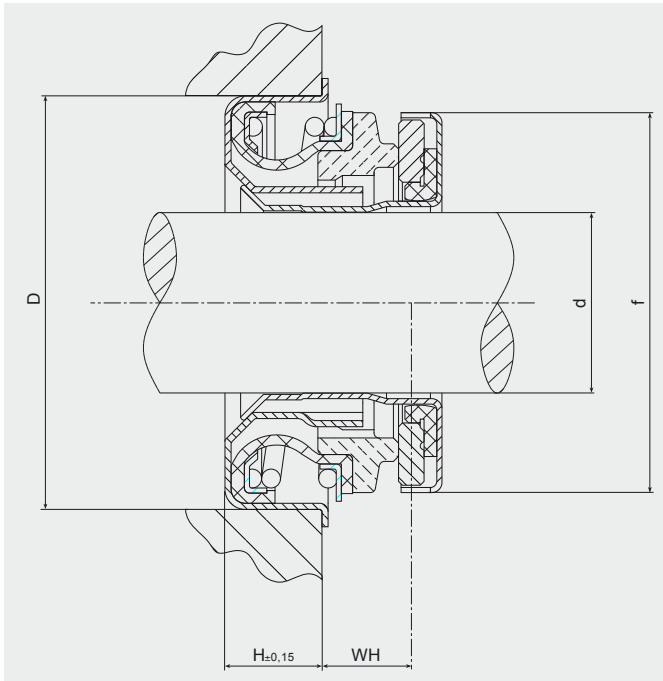

Operational limits				
P	4 bar			
V	12 m/s			
T	-35 +150°C			
Standard components - DIN 24960				
Metal parts	F1	-	-	-
Spring	F	-	-	-
Elastomeric parts	P4	-	-	-
Primary Ring	Q	-	-	-
Mating Ring	Q1	C	-	-



Type	Description			d	D	WH	H	f
UPD2	16	36,45	11,2	16±0,095	36,45±	11,2±0,1	8,2±0,15	32,5±0,2