

**Operational limits**

P	4 bar
V	12 m/s
T	-35 +150°C


**Standard components - DIN 24960**

Metal parts	F1	-	-	-
Spring	F	-	-	-
Elastomeric parts	P4	P	-	-
Primary Ring	V	Q	-	-
Mating Ring	C	B	-	-



M - MTU code: initial installation  
 A - Alternative code: initial installation

Type	Description			d	D	WH	H	f	M	A
UGH-1	15	36,6	12,5	15±14,987	36,449±36,474	12,5±0,75	7,4	32,5±0,3	7710858 500002002	7664524 7784993
UGH-2	16	36,6	12,5	15,90±16	36,449±36,474	12,5±0,75	7,4	32,5±0,3	-	-

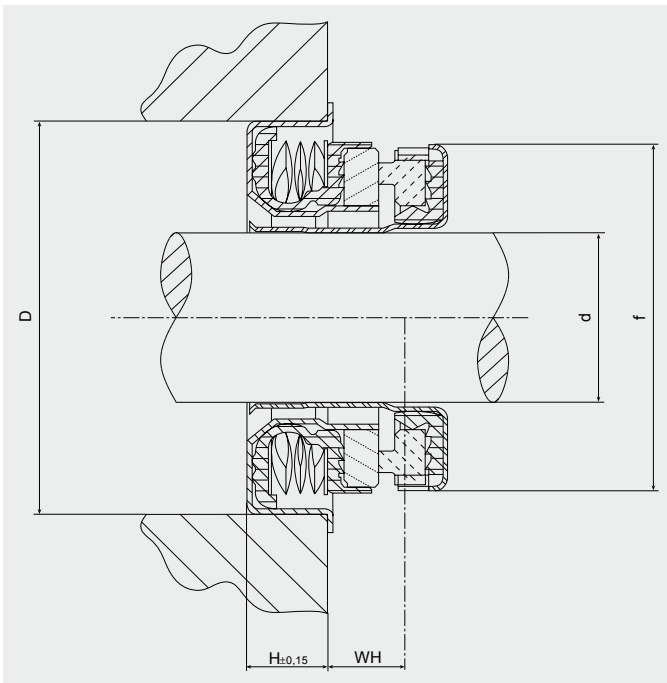

**Operational limits**

P	4 bar
V	12 m/s
T	-35 +150°C

**Standard components - DIN 24960**

Metal parts	F1	F8	-	-
Spring	F	-	-	-
Elastomeric parts	P4	-	-	-
Primary Ring	Q	V	-	-
Mating Ring	C	-	-	-



Type	Description			d	D	WH	H	f
UWP2-1	12	30	7,5	12	30,05	7,5±0,2	5,5	24,4
UWP2-2	12,7	30	7,5	12,7	30,05	7,5±0,2	5,5	24,4